

Q. 1 – Q. 25 carry one mark each.


- Q.1 The series represented by $a_n = \frac{n^2-2n}{3n^2+n}$ is
 (A) convergent (B) divergent
 (C) asymptotic (D) oscillatory
- Q.2 Inverse of the matrix $\begin{bmatrix} 3 & 2 \\ 1 & 4 \end{bmatrix}$ is
 (A) $\begin{bmatrix} 0.1 & -0.4 \\ -0.3 & 0.2 \end{bmatrix}$ (B) $\begin{bmatrix} 0.3 & -0.2 \\ -0.1 & 0.4 \end{bmatrix}$ (C) $\begin{bmatrix} 0.3 & -0.1 \\ -0.2 & 0.4 \end{bmatrix}$ (D) $\begin{bmatrix} 0.4 & -0.2 \\ -0.1 & 0.3 \end{bmatrix}$
- Q.3 The distance PQ between two position vectors $\vec{P} = -2\hat{i} + 3\hat{j} + 4\hat{k}$ and $\vec{Q} = 4\hat{i} + 5\hat{j} + 7\hat{k}$ is _____.
- Q.4 The **incorrect** statement from the following is
 (A) The peak runoff from an agricultural watershed is generally less than that from an urban watershed of the same area
 (B) The horizontal hydraulic conductivity of soil is less than its vertical hydraulic conductivity
 (C) The magnitude of a 75-year flood is less than that of a 100-year flood
 (D) The rating curve due to an unsteady flood event forms a loop
- Q.5 If x be the highest mean monthly precipitation and y be the mean annual precipitation, then the 'rainfall aggressiveness' to soil erosion is
 (A) $\frac{x^2}{y}$ (B) $\frac{x}{y^2}$ (C) $\frac{x^2}{y^2}$ (D) $\frac{y^2}{x}$
- Q.6 Discharge through an irrigation outlet is independent of the water levels in the distributary and water courses in case of
 (A) non-modular outlet (B) semi-modular outlet
 (C) Kennedy's gauge outlet (D) Gibb's module outlet
- Q.7 The USDA classification of irrigation water with regard to alkali and salinity hazards is based on
 (A) Exchangeable sodium percentage and pH
 (B) Electrical conductivity and Sodium adsorption ratio
 (C) Electrical conductivity and pH
 (D) Sodium percentage and pH
- Q.8 A steady discharge of $60 \text{ m}^3 \text{ s}^{-1}$ is passing through a trapezoidal irrigation channel with a bottom width of 5 m, bed slope of 0.01% and Manning's roughness coefficient of 0.025. The conveyance of the channel in $\text{m}^3 \text{ s}^{-1}$ is _____.
- Q.9 Dupuit-Forchheimer assumptions are used for analyzing groundwater flow in
 (A) confined aquifers (B) leaky confined aquifers
 (C) unconfined aquifers (D) both confined and unconfined aquifers

- Q.10 An unsteady time-drawdown pumping test was conducted in a confined aquifer and the drawdown was measured with time in an observation well located at a certain distance away from the pumping well. Using these time-drawdown data, we can determine
- (A) transmissivity only (B) storage coefficient only
(C) specific storage only (D) both transmissivity and storage coefficient
- Q.11 Mole drain is the most suitable drainage system for
- (A) heavy clay soil (B) loamy soil (C) sandy soil (D) silty soil
- Q.12 The efficiency of a cyclone separator can be increased by
- (A) decreasing the size of the particles (B) increasing the velocity of inlet air
(C) reducing the length of the separator (D) reducing the diameter of air outlet
- Q.13 The **correct** statement in respect of rice parboiling process is
- (A) kernel structure becomes soft and it cooks easily
(B) heat treatment during parboiling preserves some antioxidants
(C) parboiled rice retains more proteins, vitamins and minerals
(D) shelling of parboiled rice becomes more difficult
- Q.14 In the design of an agitator vessel with model volume V_1 and prototype volume V_2 , the scale-up ratio is given by
- (A) $\frac{V_2}{V_1}$ (B) $\left(\frac{V_2}{V_1}\right)^{1/2}$ (C) $\left(\frac{V_2}{V_1}\right)^{1/4}$ (D) $\left(\frac{V_2}{V_1}\right)^{1/3}$
- Q.15 The wall of a cold storage is made up of four layers; concrete, brick, cardboard and paint with respective thickness of 5, 60, 8 and 1 mm, and their corresponding thermal conductivities are 0.8, 0.7, 0.04 and 0.15 $\text{W m}^{-1} \text{K}^{-1}$. The overall resistance of the wall to conduction heat transfer in $\text{m}^2 \text{K W}^{-1}$ is _____.
- Q.16 Two very large parallel walls (gray bodies) facing each other have emissivities of 0.5 and 0.7. The view factor between these two walls is _____.
- Q.17 In a counter-current flow double pipe heat exchanger (DPHE), temperature difference between the hot and cold liquids at all positions is held constant at C . If the effectiveness of the heat exchanger is 0.65 and heat capacity ratio of hot and cold liquids is 1, the number of transfer units (NTU) is _____.
- Q.18 The values of C and n for raisin are $1.283 \times 10^{-4} \text{K}^{-1}$ and 1.02, respectively in the Henderson equation. The equilibrium moisture content of raisin in percent dry basis corresponding to the air with 70% relative humidity at 40°C is _____.
- Q.19 A power operated chaff cutter with two knives is rotating at 600 rpm. It has a conveyor type feeding mechanism which operates at a speed of 0.6 m s^{-1} . The theoretical chaff length in mm is
- (A) 20 (B) 30 (C) 60 (D) 90

- Q.20 The conversion efficiency of a solar cell is 12% . For a maximum power output of 9×10^{-3} W at an incident solar radiation of 250 Wm^{-2} , the required surface area of the solar cell in mm^2 will be _____.
- Q.21 The non-combustible constituents of the producer gas are
 (A) Carbon monoxide and Hydrogen (B) Hydrogen and Methane
 (C) Nitrogen and Carbon dioxide (D) Carbon monoxide and Nitrogen
- Q.22 The grain to straw ratio of wheat crop is 1.5 : 1. The output capacity and cleaning efficiency of a thresher at an optimal operating condition are 500 kg h^{-1} and 99%, respectively. If the grain recovery at main grain outlet is 100%, the throughput capacity in kg h^{-1} will be
 (A) 758 (B) 825 (C) 1238 (D) 1320
- Q.23 The brake power of a six-cylinder, four-stroke diesel engine running at 3000 rpm is 125 kW. Its brake specific fuel consumption is $200 \text{ g kW}^{-1} \text{ h}^{-1}$. Assuming specific gravity of fuel as 0.85, the volume of fuel to be injected per cycle per cylinder in ml is _____.
- Q.24 For a reference sound pressure of $2 \times 10^{-5} \text{ N m}^{-2}$, the sound level measured at the operator's workspace of a tractor was 80 dB. If the RMS sound pressure is increased by eight times, the resulting sound pressure level in dB, will be _____.
- Q.25 The connecting rod of an internal combustion engine is subjected to
 (A) compression only (B) tension only
 (C) both compression and tension (D) torsion only

Q. 26 – Q. 55 carry two marks each.

- Q.26 Values of the function $y = \frac{1}{1+x^2}$ are $y(0) = 1$; $y(1) = 0.5$; $y(2) = 0.2$; $y(3) = 0.1$; $y(4) = 0.0588$; $y(5) = 0.0385$; $y(6) = 0.027$. Using Simpson's one-third rule, the value of the integral $\int_0^6 \frac{dx}{1+x^2}$ is _____.
- Q.27 Daily sales figures for a week are shown in the bar chart given below. The mean daily sales and the standard deviation of the sample mean (integer value) are _____ and _____, respectively.

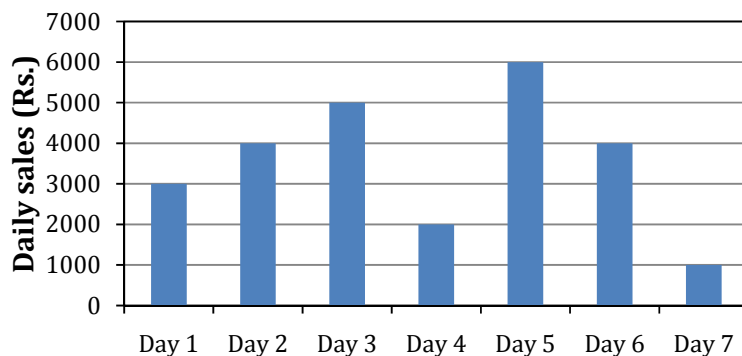

- (A) 3571, 1718 (B) 3715, 1915
 (C) 3571, 1178 (D) 3715, 1591

- Q.28 A coin is tossed ten times. The probability of getting five heads and five tails is _____.
- Q.29 The particular solution to the first order differential equation $\frac{dy}{dx} = x - e^{-x}$ for $y(0) = -1$ is
 (A) $2x^2 + e^{-x} - 2$ (B) $2x^2 + e^{-x} + \frac{1}{2}$ (C) $\frac{x^2}{2} - e^{-x} + \frac{1}{2}$ (D) $\frac{x^2}{2} + e^{-x} - 2$
- Q.30 The value of $\int_0^{\pi/2} \sin^3 x dx$ is
 (A) 0 (B) $\frac{1}{3}$ (C) $\frac{2}{3}$ (D) 1
- Q.31 Two irrigation channels are designed in the same type of alluvial soil having the channel bed slopes of 1.52×10^{-4} and 1.6×10^{-4} , respectively. If the design discharge of the first channel, using Lacey's regime theory, is $30 \text{ m}^3 \text{ s}^{-1}$, then the design discharge of the second channel in $\text{m}^3 \text{ s}^{-1}$ will be
 (A) 22.05 (B) 29.74 (C) 30.26 (D) 40.81
- Q.32 A catchment of 720 ha area has 25-year mean rainfall intensity of 100 mm h^{-1} occurring for a duration equal to its time of concentration. During a storm event, the catchment received a total of 7.5 cm design rainfall for 6 hours. Assuming ϕ -index of 0.25 cm h^{-1} and runoff coefficient of 0.6, the peak ordinate of the 6-h unit hydrograph in $\text{m}^3 \text{ s}^{-1}$ will be _____.
- Q.33 A Cipolletti weir has the crest length of 1.2 m and a crest water level of 0.5 m. The average approach velocity of water in m s^{-1} on the crest is
 (A) 0.49 (B) 1.18 (C) 1.19 (D) 1.32
- Q.34 Match the following items between **Column-I** and **Column-II** with the most appropriate combinations.
- | <u>Column-I</u> | <u>Column-II</u> |
|------------------------|---------------------------------|
| i) Direct runoff | 1) T-year rainfall depth |
| ii) Peak runoff | 2) Curve Number |
| iii) Tensiometer | 3) Aquifer |
| iv) Isoerodent map | 4) Rational formula |
| v) Isopluvial map | 5) 30-minute rainfall intensity |
| vi) Zone of saturation | 6) Field capacity |
- (A) i-4, ii-2, iii-6, iv-5, v-1, vi-3 (B) i-2, ii-4, iii-6, iv-5, v-1, vi-3
 (C) i-4, ii-2, iii-6, iv-1, v-5, vi-3 (D) i-2, ii-4, iii-6, iv-1, v-5, vi-3
- Q.35 An unconfined aquifer covering an area of 50 ha has a hydraulic conductivity of 20 m day^{-1} and specific yield of 12%. After a significant rainfall event, the water table rises from 17 m to 14.5 m below the ground level. Assuming no abstraction and outflow of groundwater during the recharge period, the amount of groundwater recharge contributed by the rainfall in m^3 is _____.
- Q.36 If an irrigation water source has the concentrations of Na^+ , Ca^{++} and Mg^{++} as 28, 10 and 5 milliequivalents per litre, respectively, then the Sodium adsorption ratio of this water is _____.

- Q.37 In a canal command, maize crop is grown in an area of 30 ha. The crop evapotranspiration (ET_c) of maize is 840 mm per season and the effective rainfall during growing season is 20 mm. It is irrigated with water having salinity of 1.1 dS m^{-1} by a surface irrigation method. If the leaching efficiency of the field soil is 0.8 and the average soil salinity tolerated by the maize crop for 100% yield is 1.7 dS m^{-1} , the depth of irrigation water in mm per season required to meet the seasonal ET_c and leaching requirement will be _____.
- Q.38 The depth of the impounded water in a 72 m long earthen dam is 6.2 m, while the tail water is 2.2 m deep. The hydraulic conductivity of the isotropic and homogeneous soil-fill of the dam is 0.53 m day^{-1} . Flow net method is used to estimate seepage wherein the number of flow channels is 6 and the number of potential drops is 21. The seepage rate through the dam in $\text{m}^3 \text{ day}^{-1}$ is _____.
- Q.39 A horizontal screw conveyer of 2.4 m length conveys wheat grain of bulk density 680 kg m^{-3} and materials factor 1.2. The screw diameter, shaft diameter and pitch of the screw are 0.5, 0.15 and 0.4 m, respectively. If the screw is completely filled with grains and rotates at 60 rpm, the capacity of the screw conveyer in $\text{m}^3 \text{ h}^{-1}$ and the actual power required in hp (approximately) are _____ and _____, respectively.
- (A) 257, 2.8 (B) 258, 2.5
(C) 275, 1.9 (D) 396, 2.9
- Q.40 A suspension contains 3.6×10^5 spores of *C. botulinum* having a D-value of 1.5 minute at 121.1°C and 8.5×10^6 spores of *B. subtilis* having a D-value of 0.9 minute at the same temperature. The suspension is heated at a constant temperature of 121.1°C . The heating time needed in minutes for the suspension to obtain a survival probability of 10^{-3} for the most heat resistant organism in it is _____.
- Q.41 Match the following items between **Column-I** and **Column-II** with the most appropriate combinations.
- | <u>Column-I</u> | <u>Column-II</u> |
|--------------------|-------------------------|
| 1) Microwave dryer | P) Cyclone separation |
| 2) Spray dryer | Q) Sublimation of water |
| 3) Freeze dryer | R) Dielectric drying |
| 4) Drum dryer | S) Drying of fruit pulp |
- (A) 1-Q, 2-S, 3-R, 4-P (B) 1-R, 2-P, 3-Q, 4-S
(C) 1-R, 2-S, 3-Q, 4-P (D) 1-Q, 2-S, 3-P, 4-R
- Q.42 A ball mill of 1.8 m diameter is loaded with steel balls each having a diameter of 6 cm. The rotational speed of the ball is kept at 75% of the critical speed. The operational speed of the ball mill in rpm is _____.
- Q.43 A fat globule of $1.5 \mu\text{m}$ diameter is rising up in a stagnant skim milk medium of 1005 kg m^{-3} density and 1.5 cP viscosity. If the density of the fat globule is 915 kg m^{-3} , the steady rising velocity of the globule in $\mu\text{m s}^{-1}$ is _____.
- Q.44 Two kg mass of air at 40°C with 0.023 kg water vapour per kg dry air is mixed with 3 kg mass of air at 20°C with 0.008 kg water vapour per kg dry air to produce 5 kg mass of air at 60% relative humidity at 28°C . Assume all the streams are at normal atmospheric pressure (101.325 kPa). The saturation vapour pressure of water in kPa at 28°C is _____.

- Q.45 In a cascade refrigeration system, the COPs of the cooling cycle and cascade are 3.7 and 4.2, respectively. If tonnage (1 TR = 3.52 kW) of the cooling cycle is 15 and the cascade removes 70% of the total heat rejected in the liquid receiver of the cooling cycle, then the powers required by the cooling and cascade compressors in hp are _____ and _____, respectively.
(A) 67.07, 46.95 (B) 52.08, 39.35 (C) 19.13, 14.99 (D) 14.27, 11.18
- Q.46 A single effect long-tube evaporator has ten tubes each of 2.5 cm diameter and 6 m length. It concentrates pineapple juice from 18 °Brix to 23 °Brix. The feed rate into the evaporator is 557 kg h⁻¹ at the boiling point of 70 °C (latent heat of vapourization = 2333.82 kJ kg⁻¹). Neglecting boiling point rise, the overall heat transfer coefficient in W m⁻² K⁻¹ for 12 °C temperature gradient across the tube walls is _____.
- Q.47 In a plate freezer, the plate temperature is maintained at -25 °C. Latent heat of crystallization is 335 kJ kg⁻¹, and the thermal conductivity and density of frozen meat are 1.25 W m⁻¹ K⁻¹ and 1060 kg m⁻³, respectively. Assuming freezing point of deboned meat at 85% water content on wet basis to be 0 °C, the freezing time in minutes for 2 cm thick block of meat, kept between a pair of freezing plates, is _____.
- Q.48 The horizontal component of soil forces acting on the front gang of a right hand offset disc harrow in the directions parallel and perpendicular to the direction of motion are 8 kN and 3 kN, respectively. The corresponding forces on the rear gang are 6 kN and 7 kN, respectively. If the horizontal component of pull acts towards the left of the direction of motion, its magnitude in kN will be _____.
- Q.49 A two-wheel drive tractor is operating a mould board plough at an average speed of 4 km h⁻¹. The draft and the rear axle torque are found to be 30 kN and 25 kN m, respectively. If the rolling radius of traction wheel is 0.7 m and the wheel slip is 20%, the tractive efficiency in percent will be
(A) 67.19 (B) 46.71 (C) 72.87 (D) 84.00
- Q.50 A power operated hydraulic sprayer operating at a pressure of 1.4 MPa has a boom with 11 nozzles spaced at 0.3 m interval. The input power of the pump is 1.5 kW and its mechanical efficiency is 75%. If the nozzle diameter and the discharge coefficient are 2.4 mm and 0.5, respectively, the average jet velocity of the nozzles in m s⁻¹ is _____.
- Q.51 A propeller type wind turbine of 8 m diameter generates 4 kW electrical power. If the overall efficiency of power generation system is 32% and the density of air is 1.2 kg m⁻³, the average wind speed in m s⁻¹ is _____.
- Q.52 In a reciprocating type mower, the maximum inertia force of 2.2 kN along the pitman occurs at 35° crank angle and 25° pitman angle with the horizontal plane. The crank radius is 50 mm and the equivalent mass at the crankpin is 2.5 kg. If the crank rotates at 600 rpm, the resultant force passing through the crankpin in kN will be
(A) 2.25 (B) 2.68 (C) 2.98 (D) 3.42
- Q.53 A multiple disc clutch is to transmit 15 kW at 750 rpm. The inner and outer radii of the friction surfaces are 60 mm and 100 mm, respectively. The coefficient of friction is 0.1 and the maximum allowable pressure is 350 kPa. Assuming uniform wear, the number of pair of contact surfaces required is _____.

- Q.54 The speed reductions in the 1st low gear of a tractor gearbox and differential with final drive are 5:1 and 40:1, respectively. For the tractor developing 24 kW power at an engine rpm of 2000 with an overall power transmission efficiency of 80%, the total torque in kN m available at the wheel axle will be
- (A) 22.92 (B) 28.64 (C) 16.54 (D) 18.33
- Q.55 A double acting hydraulic cylinder has a bore of 200 mm with a piston rod of 140 mm diameter. The extend speed of the piston is 80 mm s^{-1} . If the flow rate of oil during retraction is same as that of the extending, the retract speed of the piston in mm s^{-1} is _____.

END OF THE QUESTION PAPER

